


Label Specification


Die-Cut Label Roll

TM-C3500 1" x 1" (3A) High Gloss Paper Label 3200/Roll
 SKU-811006

<Printing Side>

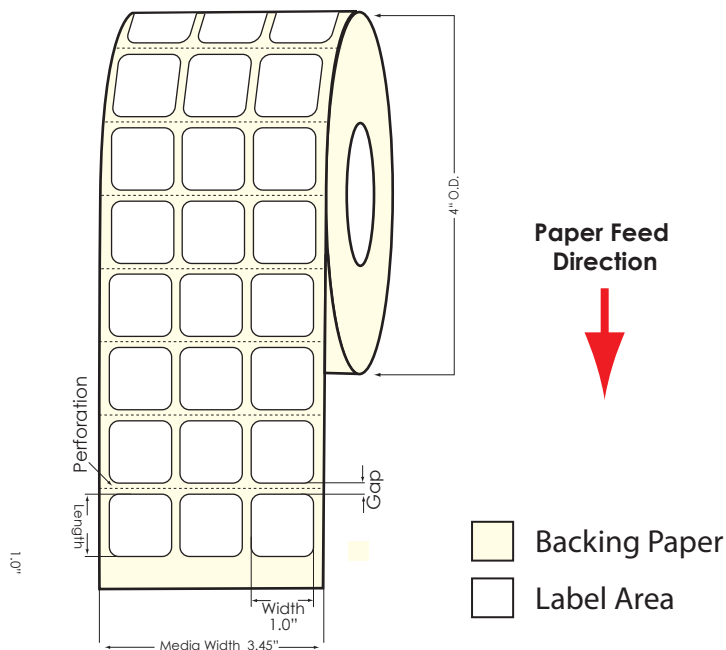

<Back Side>

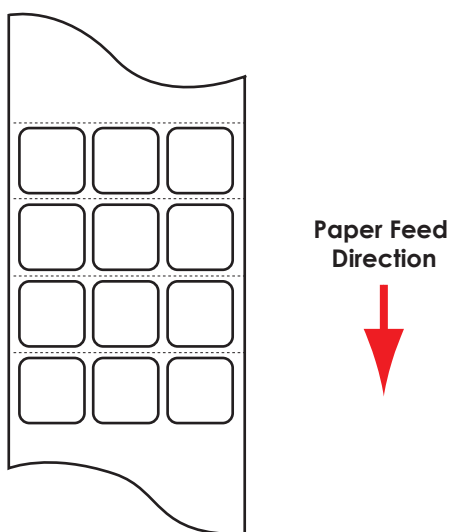

+1(866) 299-0066
 +1(416) 749-3681

Fax: +1 (416) 981-3071

Canadian Office

53 Queen's Plate Drive, Unit 2
 Toronto ON M9W-6P1

www.DuraFastLabel.ca

US Office

1712 Pioneer Ave., Ste 500
 Cheyenne WY 82001

www.DuraFastLabel.com

Inkjet High Gloss Paper #1 Specification

Spec Name: Inkjet High Gloss Paper #1 (Memjet High Gloss)

Ink Type Supported: Dye & Pigment inks, Toner

Adhesive Type: Permanent

Material Type: Paper

Topcoat Finish: High Gloss

DuraFast Label Company's **Inkjet High Gloss Paper #1 label material is ideal for water-based dye or pigment ink-based** color label printers, Memjet color label printers, and laser color label printers. It features a 4.1 Mil (59#) paper with a glossy finish, a cold temperature permanent adhesive, and a white, 41# densified kraft sheet liner. Approximately 247 pounds per MMSI (million square inches).

Recommended Applications:

Offering photorealistic, high resolution imaging, **Inkjet High Gloss Paper #1** labels are ideal for a variety of label printing applications including: prime product labels, food labels, baked good labels, coffee and tea labels, industrial labels, shipping and logistics labels, and general purpose labels.

Facestock

Featuring a 4.1 Mil (59#) white paper with a high gloss finish that is compatible with all dye inks and a large selection of pigment inks and toners, Inkjet High Gloss Paper #1 labels offer high resolution, photo quality imaging.

Typical and Average Values

Basis Weight	58.8 lbs (25"x38-500) (87 gr/sq meter)	TAPPI T410 Test Method
Opacity	88%	TAPPI T425 Test Method
Caliper (average)	4.1 mils (104 um)	TAPPI T411 Test Method
Gloss Felt Side	45% (60deg)	TAPPI T480 Test Method

Adhesive

The permanent non-tackified, cold temperature general purpose adhesive used on **Inkjet High Gloss Paper #1** labels adheres to a broad range of packaging materials.

Typical and Average Values

Adhesive Type	Acrylic	
Caliper (Calculated)	0.7 mils (17.3um)	
Minimum Application Temperature	-20F (-29C)	
Service Temperature	-65 to 180F (-54 to 82C)	

Liner

The 41# liner used on DuraFast **Inkjet High Gloss Paper #1** labels is a densified white kraft liner offering outstanding caliper control.

Typical and Average Values

Basis Weight	40.6 lbs/24x36-500 (66.2g/sq meter)	TAPPI T410 Test Method
Caliper (Average)	2.4mil (61 um)	TAPPI T411 Test Method
Opacity	60%	
Tear - MD / CD	35g [MD] / 39g [CD] (343.2 mN [MD] / 382.5 [CD])	TAPPI T414 Test Method
Tensile - MD / CD	40lb/in [MD] / 17lb/in [CD] (7.0 kN/m [MD] / 3.0 kN/m [CD])	TAPPI T494 Test Method

Regulatory Compliance

This label information sheet contains data believed to be accurate with values that reflect the materials' typical and average characteristics based on tests believed to be reliable. This information sheet does not constitute a specification, nor does the information contained within constitute a warranty or guarantee. All DuraFast Label Company products are sold with the understanding that you have determined the suitability of product for any given purpose. No representative, salesperson, or agent of DuraFast Label Company is authorized to give any guarantee, warranty, or make any representation contrary to the above. The sale is subject to the company's standard Terms and Conditions in effect at the time of the sale.

