

ingenico

AXIUM EX6000

Mobile payment and commerce solution
for any business on the go



- Pocket-sized Smart POS powered by Android 10 for digital experience everywhere
- Leading-edge Android apps to support business on the go
- Top-level security with Android & PCI PTS V6 compliance
- Supported by AXIUM platform to unlock the full potential of digital commerce



 axium

The AXIUM EX6000 brings a high-mobility digital payment acceptance solution to any mobile business.

The power of Android 10. Harness the power of the Appstore.

Small enough to carry in the pocket all day

Payment anywhere and anytime

- 4G, 3G, GPRS, Bluetooth and WiFi

Large 5" touchscreen and ergonomic interface

Optimized battery for a long business day on the go

- (2930mAh, 11.28 Wh)


Raising the bar on security with PCI PTS v6

Powerful rear camera (5MP) and scanner (option)

Powerful processing to increase speed and output

- Boosted memory (Up to 2GB RAM 16GB FLASH)
- High speed processor (ARM Quad-core cortex A53)

All methods of payment accepted (EMV Chip & PIN, contactless, magstripe or digital wallets and QR-code based payment)

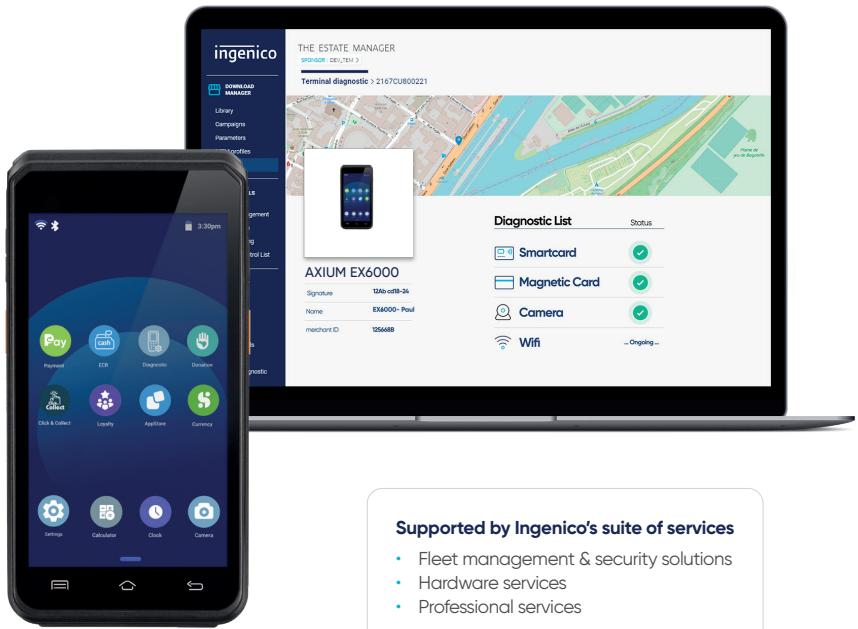

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

OS	• Android	• Android 10 Security OS	✓	Audio	• Support audio play • Headphone	✓																																														
Memory	• Internal • External	• 16GB Flash, 2GB RAM • MicroSD Card slot	✓ ✓	Connectivity	• WAN • LAN	• USB-C • 4G fallback 3G and GPRS • Bluetooth 4.2 support low energy • IEEE 802.11 a/b/g/n/ac 2.4GHz and 5GHz																																														
Processor	• Application processor • Crypto processor	• 64-bit ARM, Cortex Quad-core A53, 1.3GHz • 32-bit ARM, security core SC300, 192MHz	✓ ✓	Card readers	• Magnetic card reader • Smart card reader • NFC/contactless	• Support ISO 1/2/3 track data, bi-directional swiping • EMV Contactless L13.0 spec compliant; support ISO / IEC 14443 Type A / B	✓ ✓ ✓	Connections	• USB	• USB Type C	SAM / SIM slots	• 3 slots (SAM + SIM)	• 2 SIM + 1 SAM	✓	Data capture	• Positionning • Rear camera • Scanner	• Tracking GPS, GLONASS, BEIDOU • 5MP, autofocus, flash, code scanning • Camera scanner with Honeywell library	Display	• Color / capacitive multi-touch	• 5.0"HD, 1220 x 720 px	✓	Battery	• Li-ion	• 2930 mAh / 3.85V, 11.28Wh	Keys & Keypad	• Quick scan keys • Power key & volumes keys • Capacitive screen keys	• Physical screen keys: Menu, Home, Back	✓ ✓ ✓	Size	• Terminal only	• 5.91 x 3.03 x 0.67" (150 x 77 x 17 mm)	Terminal wake-up	• Wake-up gesture	• Double click capacitive screen to wake up the terminal system	✓	Weight	• Terminal + battery	• 8.9oz (250g)					Security	• PCI PTS V6						Environment	• Operating temperature • Storage temperature • Operating humidity	• 14°F to 122°F (-10°C to +50°C) • -4°F to 158°F (20°C to +70°C) • 10% to 90% non-condensing
Card readers	• Magnetic card reader • Smart card reader • NFC/contactless	• Support ISO 1/2/3 track data, bi-directional swiping • EMV Contactless L13.0 spec compliant; support ISO / IEC 14443 Type A / B	✓ ✓ ✓	Connections	• USB	• USB Type C																																														
SAM / SIM slots	• 3 slots (SAM + SIM)	• 2 SIM + 1 SAM	✓	Data capture	• Positionning • Rear camera • Scanner	• Tracking GPS, GLONASS, BEIDOU • 5MP, autofocus, flash, code scanning • Camera scanner with Honeywell library																																														
Display	• Color / capacitive multi-touch	• 5.0"HD, 1220 x 720 px	✓	Battery	• Li-ion	• 2930 mAh / 3.85V, 11.28Wh																																														
Keys & Keypad	• Quick scan keys • Power key & volumes keys • Capacitive screen keys	• Physical screen keys: Menu, Home, Back	✓ ✓ ✓	Size	• Terminal only	• 5.91 x 3.03 x 0.67" (150 x 77 x 17 mm)																																														
Terminal wake-up	• Wake-up gesture	• Double click capacitive screen to wake up the terminal system	✓	Weight	• Terminal + battery	• 8.9oz (250g)																																														
				Security	• PCI PTS V6																																															
				Environment	• Operating temperature • Storage temperature • Operating humidity	• 14°F to 122°F (-10°C to +50°C) • -4°F to 158°F (20°C to +70°C) • 10% to 90% non-condensing																																														

