




TEW-941APBO 5 dBi WiFi 6 AX1800 Outdoor PoE+ Omni-Directional Access Point

TRENDnet's 5 dBi WiFi 6 AX1800 Outdoor PoE+ Omni-Directional Access Point is designed for point-to-point and point-to-multi-point WiFi bridging applications. Contact us to learn more!

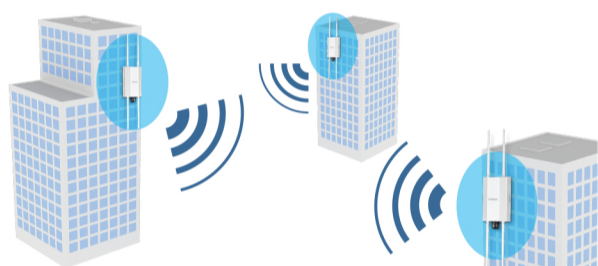

Wireless Multi-Point Bridge


Use this dual band wireless AX1800 point-to-multi-point bridge to conveniently link two or more locations together with WiFi 6 AX1800 speeds and performance.



WiFi 6 AX1800

AX1800 WiFi 6

This WiFi 6 outdoor access point supports dual band WiFi 6 AX1800 to maximize point-to-point networking speeds and wireless client connectivity.

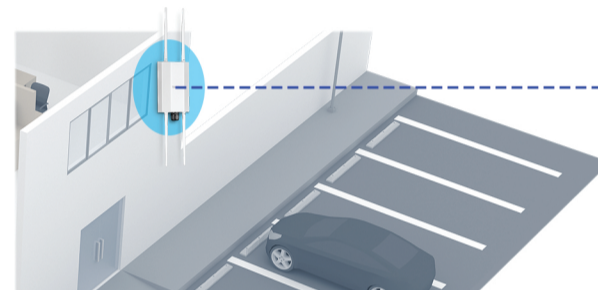

Outdoor Ready

Built for outdoor environments with an IP67 outdoor protection rating and an operating temperature range of -22° – 60° C (-7.6° – 140° F).

- 2 x 5 dBi 2.4GHz omni-directional antennas, 2 x 5 dBi 5GHz omni-directional antennas
- 1 x 2.5G PoE+ LAN port
- Supports Access Point, Client Bridge, and Repeater modes
- IP67 outdoor weather rated housing
- Remote cloud management available with TRENDnet Hive (Additional fee applies)

