



Label Specification

Die-Cut Label Roll
TM-C3500 2.5" x 1.25" Chemical Label 750/Roll
SKU-815041

<Printing Side>

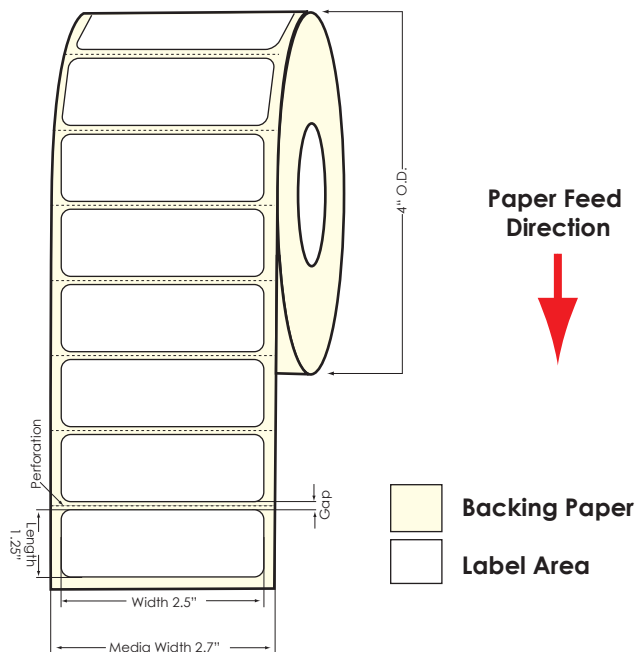

<Back Side>

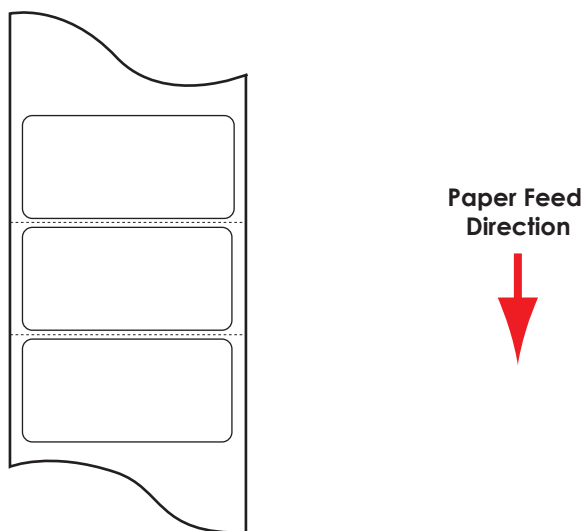

+1(866) 299-0066
+1(416) 749-3681

Fax: +1 (416) 981-3071

Canadian Office

53 Queen's Plate Drive, Unit 2
Toronto ON M9W-6P1



www.DuraFastLabel.ca

US Office

1712 Pioneer Ave., Ste 500
Cheyenne WY 82001



www.DuraFastLabel.com

Inkjet 5 Mil Chemical Label #1 (GHS BS5609) Specification

Spec Name: Inkjet 5 Mil Chemical Label #1

Ink Type Supported: Pigment ink only

Adhesive Type: Permanent

Material Type: Synthetic

Topcoat Finish: Matte

DuraFast Label Company's **Inkjet 5 Mil Chemical Label #1 (GHS BS5609)** label material is for pigment ink-based color label printers only and features a 5 mil BS5609 Section 3 compliant synthetic facestock, a clear, general purpose permanent adhesive, and a bleached, super-calendared kraft sheet liner.

Recommended Applications:

With its durable synthetic facestock, which is GHS BS5609 Section 3 compliant, and extreme resistance to water, UV light, oil, and chemical exposures, **Inkjet 5 Mil Chemical Label #1 (GHS BS5609)** labels are ideal for a wide range of chemical and GHS label applications including: GHS labels, chemical drum labels, marine labels, outdoor labels, horticulture labels, agriculture labels, pool chemical labels, and more.

Facestock

Featuring a GHS BS5609 Section 3 compliant synthetic facestock designed for harsh environments and a matte finish, **Inkjet 5 Mil Chemical Label #1** facestock is durable. In addition to its compatibility with pigment inks, it is writable with pens, pencils, surgical markers, and permanent markers. The facestock can be used with a variety of pigment ink-based color label printers.

Typical and Average Values

Basis Weight	69.3 lbs per ream	TAPPI T410 Test Method
Caliper	.0051 (5.1 Mil)	TAPPI T411 Test Method

Adhesive

The clear, general purpose permanent adhesive used on DuraFast **Inkjet 5 Mil Chemical Label #1 (GHS BS5609)** labels adheres to a broad range of packaging materials and meets FDA 21 CFR 175.105 requirements for indirect food contact.

Typical and Average Values

Adhesive Type	Emulsion Acrylic	
Minimum Application Temperature	10F	
Service Temperature Maximum	-40 to 300F	

Liner

The 50# liner used on DuraFast **Inkjet 5 Mil Chemical Label #1 (GHS BS5609)** labels is a super-calendared bleached kraft liner offering high strength, durability, and tear resistance.

Basis Weight	57.7 lbs/24x36-500
---------------------	--------------------

Caliper (Average)	0.0032 inches (3.2 Mil)
--------------------------	-------------------------

Regulatory Compliance

BS5600 Section 3 only. Meets FDA 21 CFR 175.105 requirements for indirect food contact.

This label information sheet contains data believed to be accurate with values that reflect the materials' typical and average characteristics based on tests believed to be reliable. This information sheet does not constitute a specification, nor does the information contained within constitute a warranty or guarantee. All DuraFast Label Company products are sold with the understanding that you have determined the suitability of product for any given purpose. No representative, salesperson, or agent of DuraFast Label Company is authorized to give any guarantee, warranty, or make any representation contrary to the above. The sale is subject to the company's standard Terms and Conditions in effect at the time of the sale.

