



eBridge8PCRM



facilitates system upgrades from analog to IP utilizing existing legacy Coax and eliminates the costs and labor associated with installing new network cabling. Data transmission and power over the Coax is possible up to 457m in comparison to 100m Ethernet distance (CAT5e). A maximum range from head end to the edge device/camera is 657m taking into consideration that up to 100m of structured cable may be deployed from the receiver to the network switch and the transceiver to the edge device/camera. Lifetime warranty. Made in the U.S.A.

### **Overview**

eBridge8PCRM is an eight (8) port rack mount EoC Receiver that transmits data and power over coax cable in a PoE compliant format. It is powered by a UL Listed limited power source such as a midspan or endspan. Unit passes PoE/PoE+ up the coax to an eBridge1PCT/eBridge1PCTX transceiver. The transceiver in turn delivers that PoE compliant power to an edge device/camera. This plug and play unit

### **Specifications**

#### **Input:**

- Powered by a UL Listed limited power source, PoE midspan or endspan.

#### **Ethernet:**

- Connectivity: eight (8) RJ45, auto-crossover.
- Wire type: 4-pair CAT5 or better structured cable.
- Distance: up to 100m.
- Speed: 10/100BaseT, half/full duplex, auto negotiation. PoE compliant to IEEE 802.3af (15W) and PoE+ compliant to IEEE 802.3at (30W) delivered to camera by eBridge transceiver.
- Throughput is rated to pass 25mbps of data at distances up to 457m with proper headend equipment which supports Megapixel, HD720, HD1080.

#### **Coax:**

- Distance: up to 457m for power delivery of coax.
- Connectivity: eight (8) BNC, RG-59/U or similar.

#### **LED Indicators:**

Blue LED - Coax link connection.  
Green - PoE ON.  
Green - Power ON.  
RJ45 LEDs: Yellow - IP Link status,  
Green - 10/100Base-T/active.

#### **Environmental:**

- Operating Temperature: -4°F to 120.2°F (-20°C to +49°C).
- Storage Temperature: -22° to 158°F (-30° to +70°C).
- Relative humidity: 20 to 85%, non-condensing.
- Operating Altitude: -1000 to 6,561.679 ft. (-304.8 to 2000m).

#### **Electrical:**

- BTU/Hr.: 409.5 BTU/Hr. max.

#### **Functions:**

- Auto detection and protection of legacy non-PoE cameras/devices.

#### **Applications:**

- Retrofit digital IP cameras in an analog CCTV installation.
- Works with Megapixel, HD720, HD1080 and VGA (SD) cameras.
- Extend Network link distance in an industrial environment.
- Upgrade deployed CCTV Coax to a digital network in Retail, Hospitality, Arenas, Casinos, Airports, Schools, Hospitals, Transportation, etc.

#### **Accessories:**

##### **Input (Power):**

**NetWay8M:** Eight (8) port Managed Midspan.

**NetWay16M:** Sixteen (16) port Managed Midspan.

##### **Transceivers:**

**eBridge1PCT:** Single port ethernet/PoE transceiver.

**eBridge1PCTX:** Single port ethernet/PoE or PoE+ transceiver.

#### **Mechanical:**

- 1U rack mount chassis for use in standard EIA 19" rack.
- Dimensions (H x W x D approx.): 1.625" x 19.125" x 8.5" (42mm x 486mm x 216mm).
- Product weight (approx.): 2.8 lbs. (1.27 kg).
- Shipping weight (approx.): 4.2 lbs. (1.9 kg).

### **Agency Approvals**



UL/CUL Listed for Information  
Technology Equipment (UL 60950-1).




European Conformity



C-Tick Compliant  
Z1409

## **eBridge Plus Receiver / eBridge Plus Transceiver Compatibility:**

Ethernet and Pass Through Power over Coax Solutions.

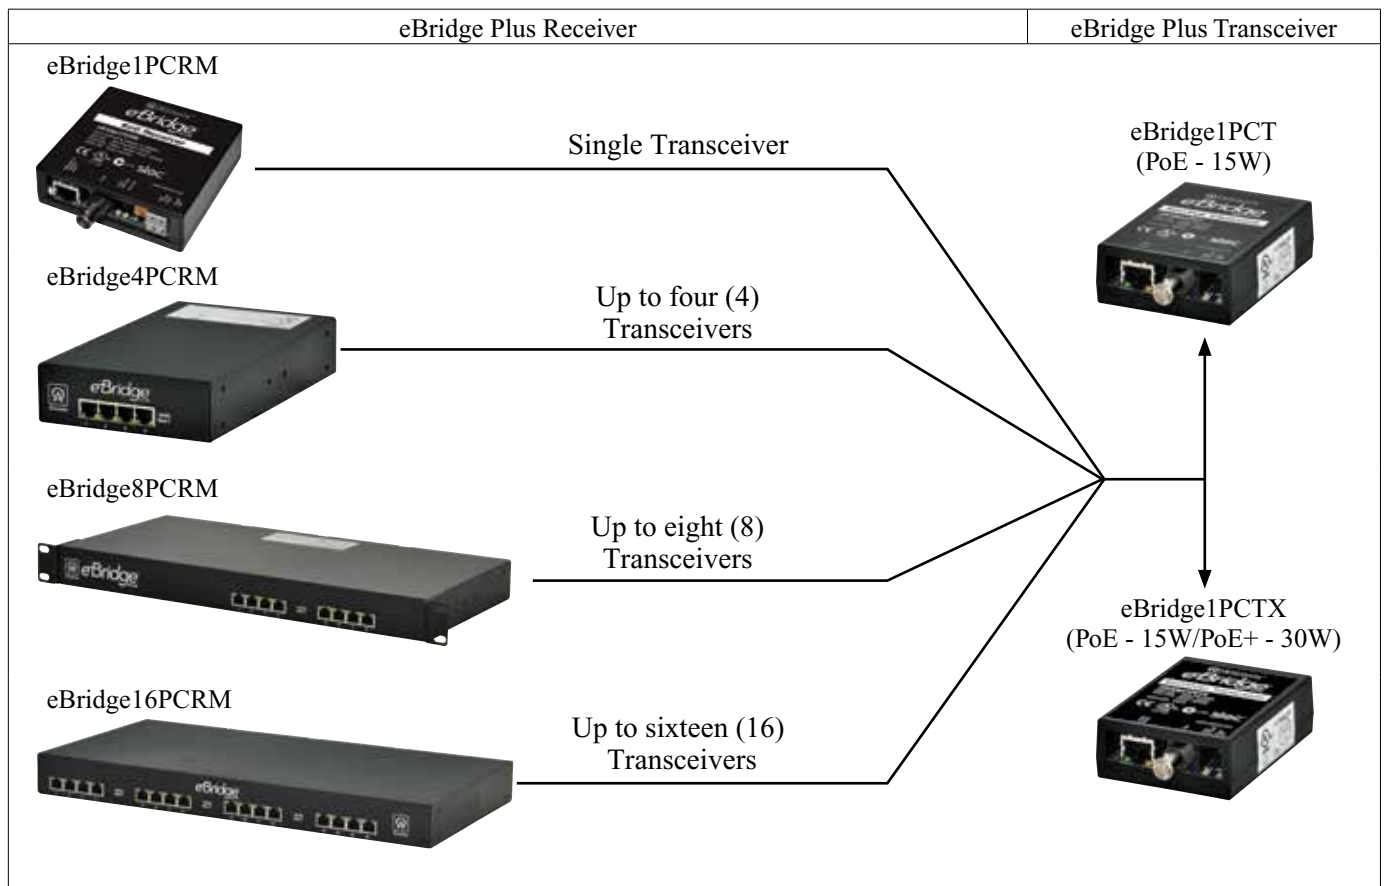

### **Enclosure Dimensions (H x W x D approximate):**

1.625" x 19.125" x 8.5" (42mm x 486mm x 216mm)

